

Chassis Monitor



19"

Specifications




| | |
|--------------------------------|---|
| Model Name | R19L300-CHM2 |
| Viewable Size Image | 19" |
| Active Display Area(mm) | 376.32(H)x301.56(V) |
| Pixel Pitch(mm) | 0.294(H)x0.294(V) |
| Number of Pixels | 1280x1024 |
| Contrast Ratio | 1300:1 (typ.) |
| Display Color | 16.2M (8 bits/colors) |
| Brightness(cd/m ²) | 300 (typ.) |
| Viewing Angle(CR>=10) | -89~89(H); -89~89(V) |
| Synchronization Range | |
| Horizontal/Vertical | 31.5~80.0KHz/60~75Hz |
| Recommended Resolution | 1280x1024@60Hz, 75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 41W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Optional Touch Screen | Resistive, Capacitive, SAW, IR |

Remarks: R19L300 series= VGA Input only

R19L340 series= VGA+Video Input

Mechanical Drawing

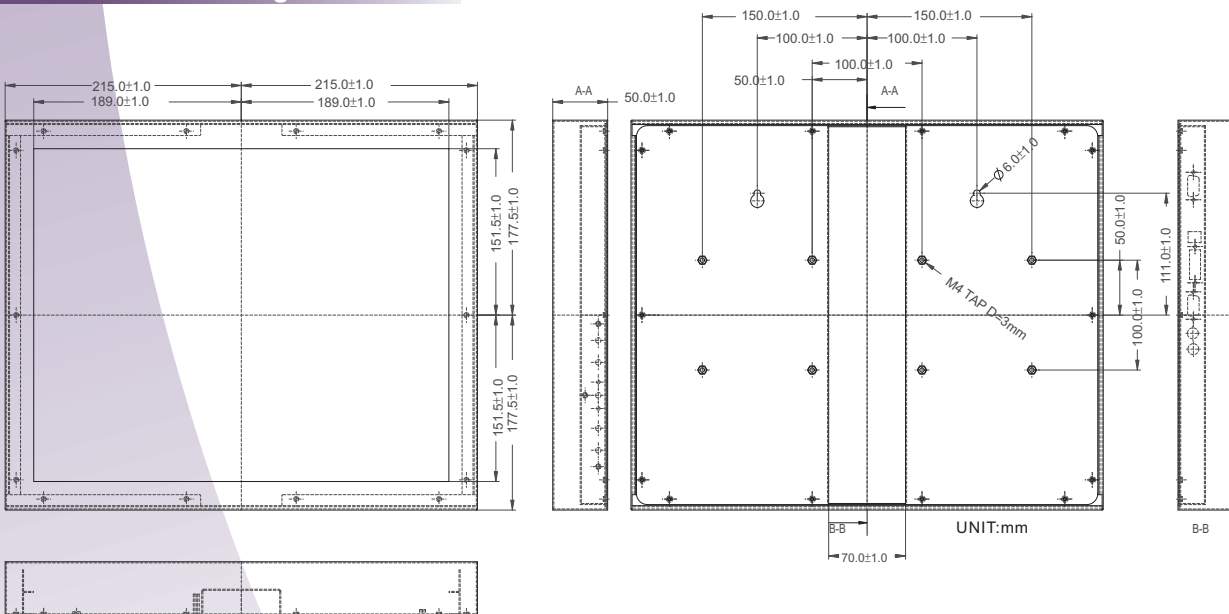

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

| Rev. | Reasons | Revised Date |
|------|------------|--------------|
| 1.3 | Pic change | Aug-09-13 |
| | | |